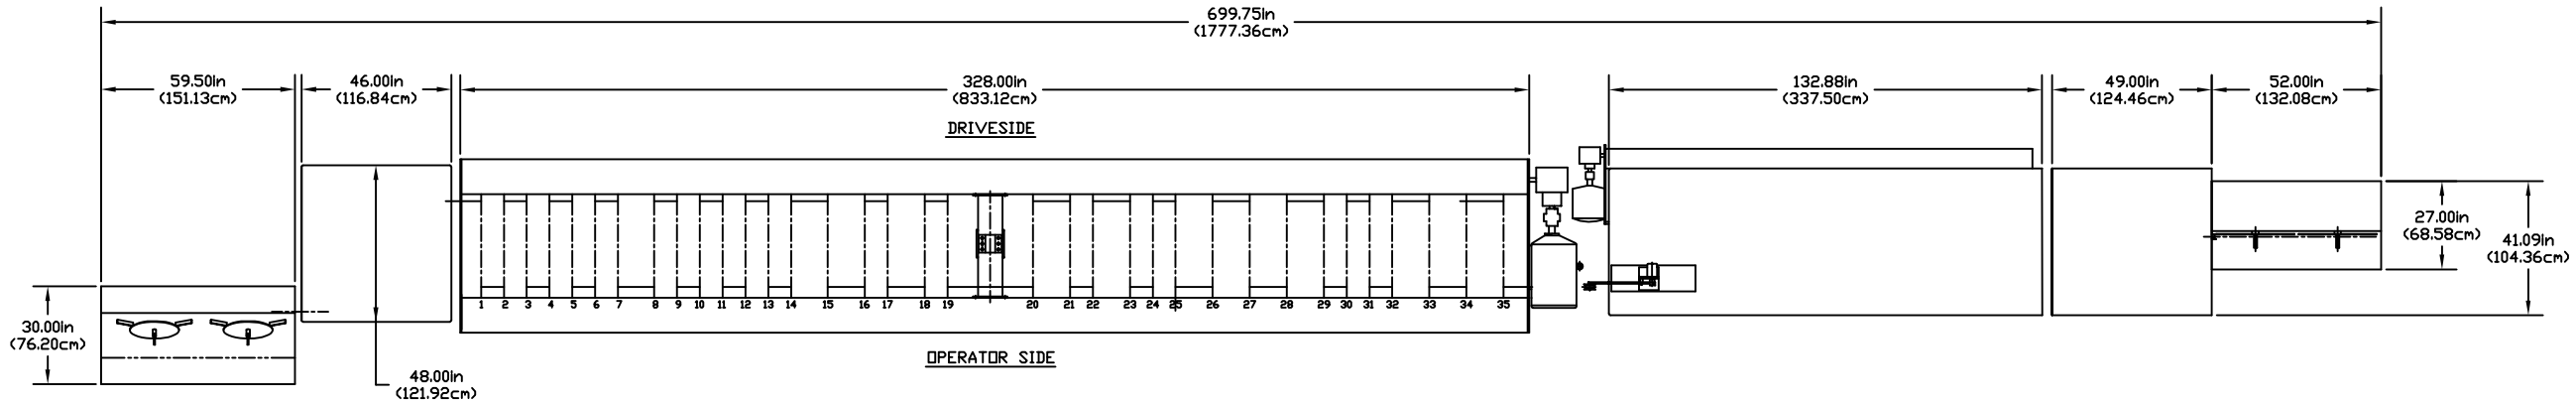

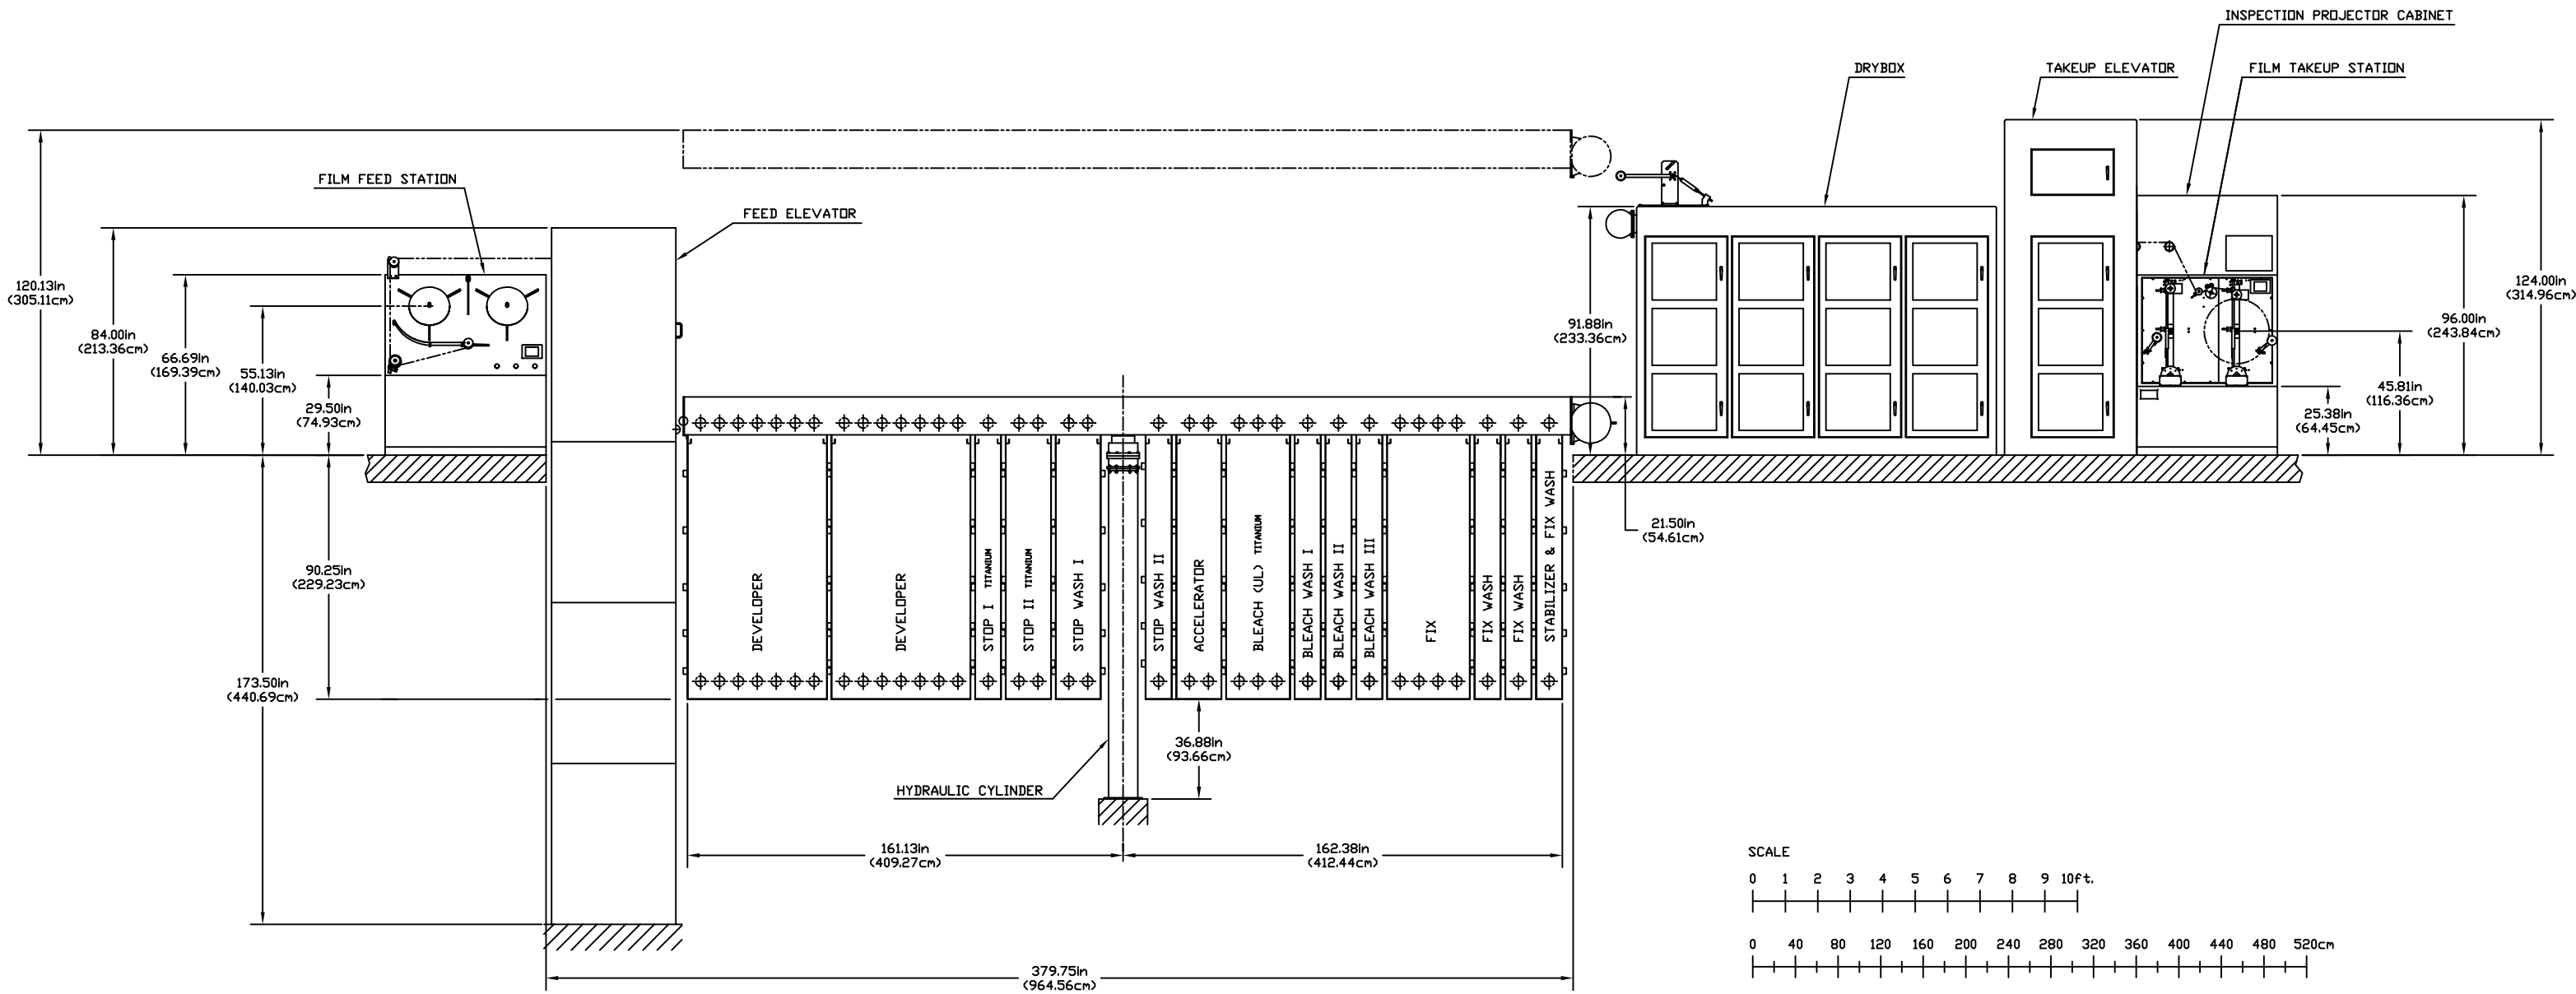

SCALE

0 1 2 3 4 5 6 7 8 9 10ft.

0 40 80 120 160 200 240 280 320 360 400 440 480 520cm

(3) WEIGHT SUPPORTED BY HYD. CYLINDER IS 12,000LBS.

(2) FEED ELEVATOR DIFFERENTIAL = 2308 FT.; TAKE-UP ELEVATOR DIFFERENTIAL = 820 FT.

(1) EACH NON-SUBMERSED WET RACK HOLDS 228.5 FT, DRY BOX CAPACITY = 5,153 FT.

NOTES:

		X	
		X	
QTY	PART OR POSITION NO. / NAME	DESCRIPTION - MATERIAL - FINISH	

UNLESS OTHERWISE SPECIFIED
1. DIMENSIONS ARE PER ANSI Y14.5-1973
2. SURFACE ROUGHNESS PER ANSI B46.1-1978
3. LINEAR DIMENSIONS IN INCHES
4. LINEAR TOLERANCES
X ± .05, .XX ± .02, .XXX ± .005
5. ANGULAR TOLERANCES
X ± 5°, .X ± .5°
6. MACHINED SURFACES
1 AND / ALL PLANES .002/INCH
DIAMETERS WITHIN .005 TIR
MAXIMUM SURFACE ROUGHNESS √ 32
7. BREAK EDGES .01 TO .03
8. RESISTANCE VALUES IN OHMS
9. CAPACITANCE VALUES IN MICROFARADS

SCALE:	1:30
DRAWN:	RSK 8APR08
ENGR:	MICHELSON
APPR:	
	x

THE INFORMATION DISCLOSED HEREIN IS THE EXCLUSIVE PROPERTY OF
TECHNICAL FILM SYSTEMS
OR MAY CONTAIN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN CONSENT OF THE ABOVE

LAYOUT - OUTLINE,
CPD-1300

SH 1 OF 1

D138-0034